



DADO 33 TERRA magnete

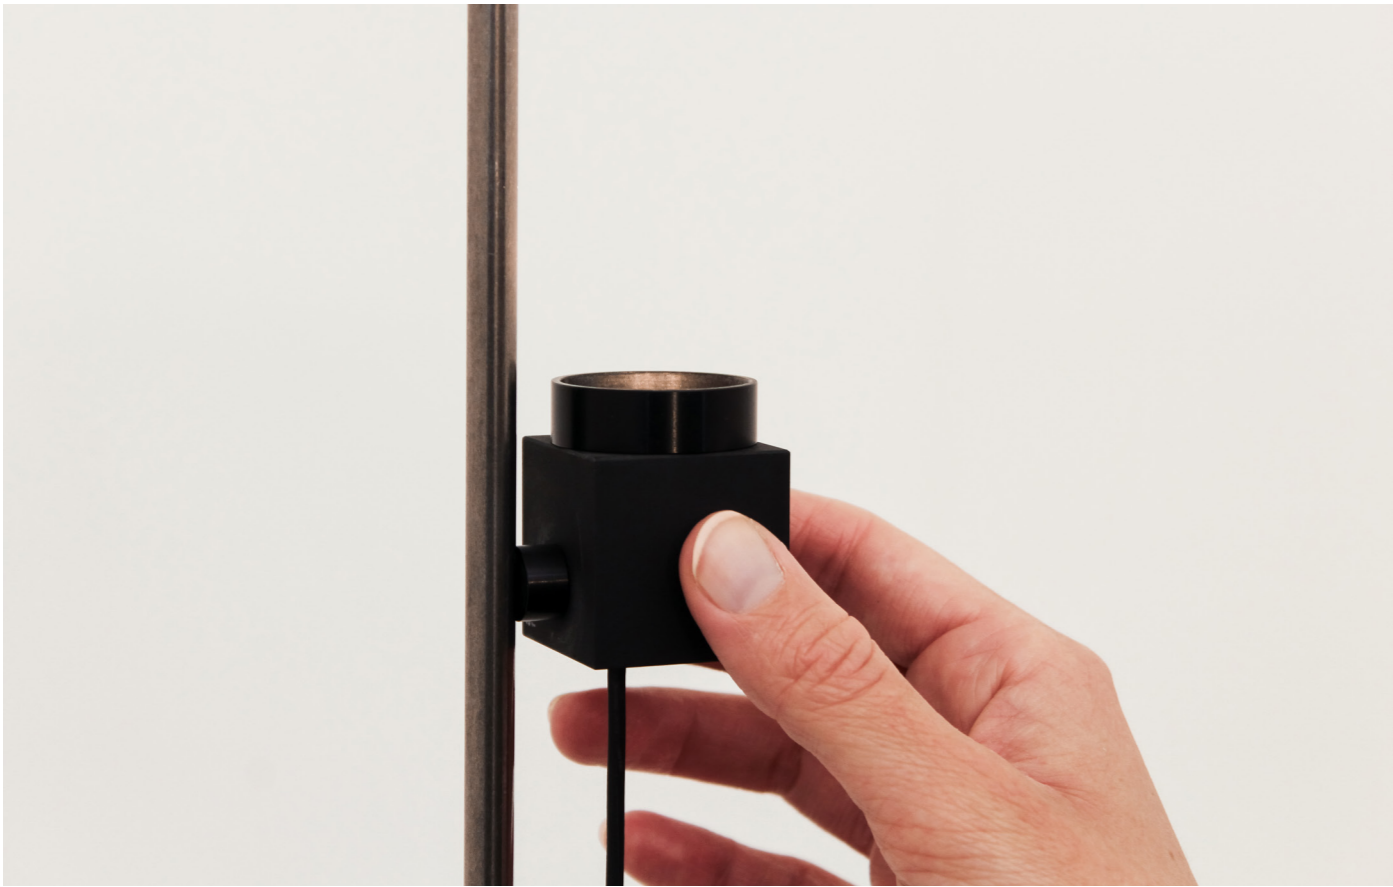


DADO 33 TERRA magnete

Indoor floor lamp, dimmable with a foot switch.
 Stainless steel frame with one or two DADO 33 lamps with a free-standing magnetic attachment.
 Dimensions: Base Ø110 mm, Stem Ø8 mm, overall height 200 cm, lamp body 33 x 33 x 33 mm.
 Can be combined with a MOTORE rechargeable device.


installation use	floor-standing indoor
power supply	220 - 230V AC
power	4.2W or multiples
light source	LED
color temperature	2700K 3000K
luminous flux	380 400lm or multiples
color rendering index (CRI)	> 90
unified glare rating (UGR)	< 19
dimming	with foot switch
standard optics	45°, WIDE OPEN
insulation class	III



- UNI EN 12464-1-2
- CEI EN 60598-1
- CEI EN 62031
- CEI EN 62471
- CEI EN 55015
- CEI EN 61547
- CEI EN 61000 -3-2
- CEI EN 61000-3-3
- CEI EN 50581-2012

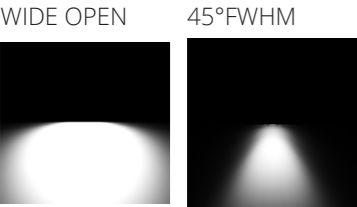

EN 02/2024 ailis srl Updated technical contents.
 Subject to change without notice.

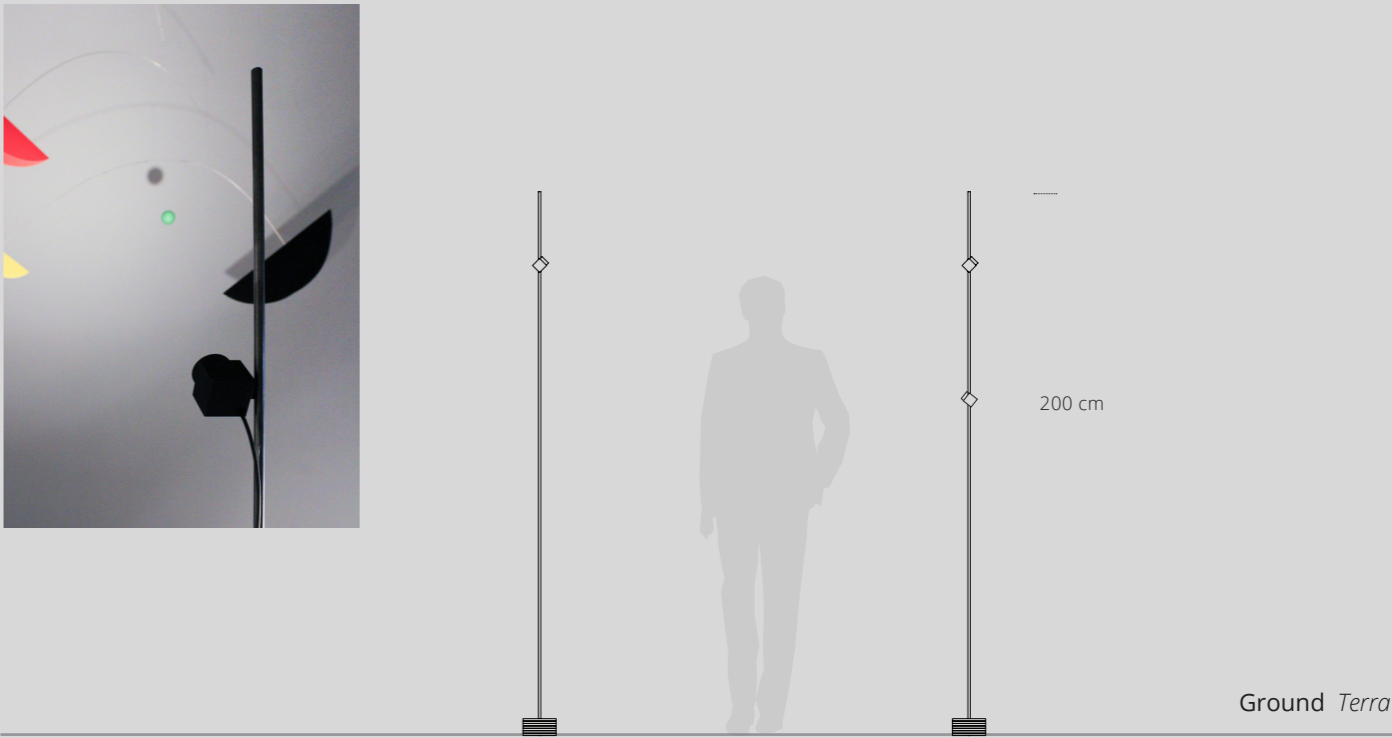

DADO 33 TERRA magnete

ITEM	WATT	LUMEN	BEAM	DIMMING	PROTECTION LEVEL	FINISH
DAD-33-200-1-2700K-__BK	4,2 W	380	45° WO	Pedaliera	IP 30	Black anodised
DAD-33-200-1-3000K-__BK	4,2 W	400	45° WO	Pedaliera	IP 30	Black anodised
DAD-33-200-2-2700K-__BK	8,4W	760	45° WO	Pedaliera	IP 30	Black anodised
DAD-33-200-2-3000K-__BK	8,4 W	800	45° WO	Pedaliera	IP 30	Black anodised

CODICE D'ORDINE / ORDER CODE

DAD-33-200-1-2700K-__BK

45° WO apertura fascio / beam

ESEMPIO / EXAMPLE

DAD-33-200-1-2700K-WO-BK

MOTORE accessorio

ITEM	RECHARGEABLE BATTERY	PROTECTION LEVEL	FINISH
MOT-12-33-DC	33 Wh	IP 20	steel

Rechargeable accumulator and charge dispenser.
 Powered by included charger.
 Stainless steel casing.




DADO 33 TERRA morsetto




DADO 33 TERRA morsetto

Indoor floor lamp, dimmable by foot pedal button and switch.
 Stainless steel structure, one or two DADO 33 lamps with fixing clamp.
 Dimensions: Base Ø110 mm, Stem Ø8 mm, overall height 200 cm, lamp body 33 x 33 x 33 mm.
 It can be used in combination with MOTORE rechargeable device.


installation use	floor indoor
power supply	100/240V AC 50/60Hz with plug-in adapter
power	4.5W
light source	LED
color temperature	2700K 3000K
luminous flux	490lm 520lm
color rendering index (CRI)	> 90
unified glare rating (UGR)	< 19
dimming	push button
standard optics	45°, Open Wide
insulation class	III



UNI EN 12464-1-2
 CEI EN 60598-1
 CEI EN 62031
 CEI EN 62471
 CEI EN 55015
 CEI EN 61547
 CEI EN 61000 -3-2
 CEI EN 61000-3-3
 CEI EN 50581-2012

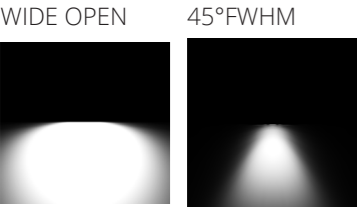

EN 02/2024 ailis srl Updated technical contents.
 Subject to change without notice.

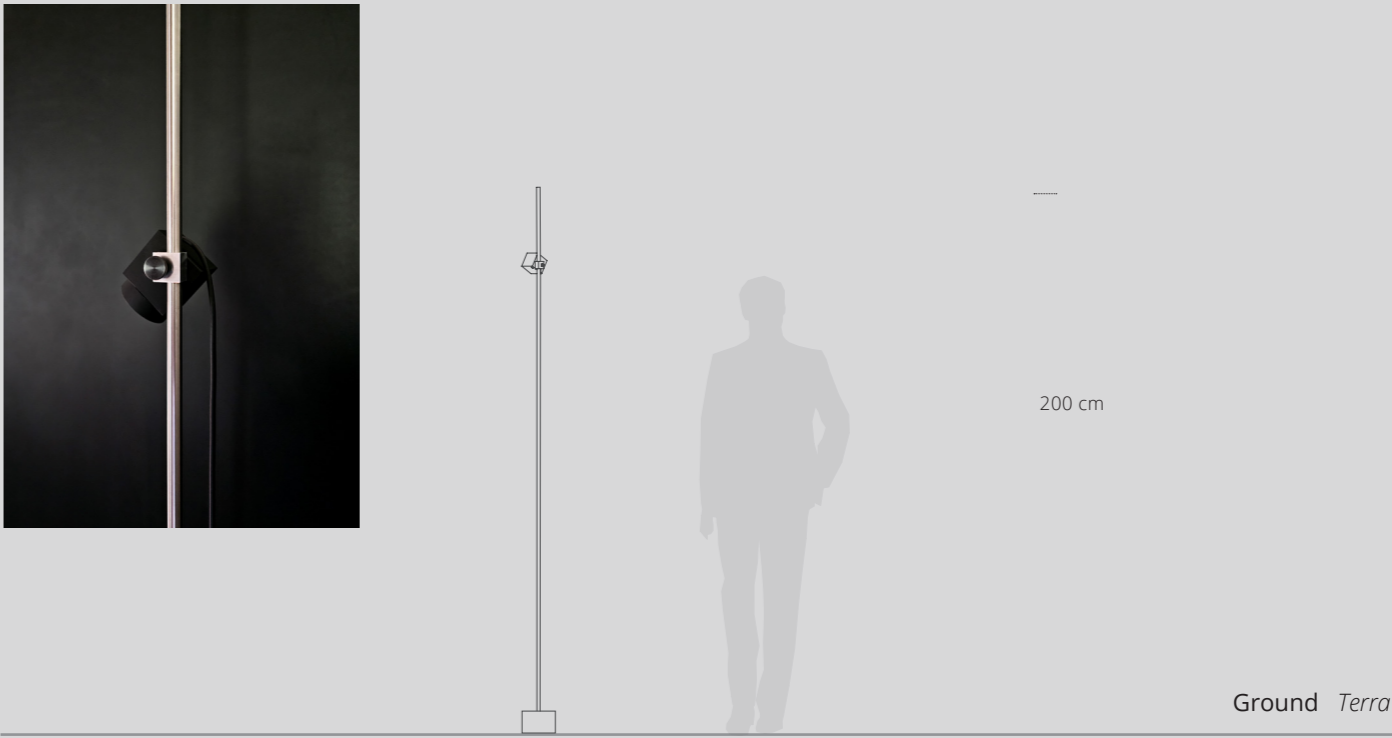

DADO 33 TERRA morsetto

ITEM	WATT	LUMEN	BEAM	DIMMING	PROTECTION LEVEL	FINISH
DAD-33-200-1-2700K-__BK	4,2 W	380	45° WO	Pedaliera	IP 30	Black anodised
DAD-33-200-1-3000K-__BK	4,2 W	400	45° WO	Pedaliera	IP 30	Black anodised
DAD-33-200-2-2700K-__BK	8,4W	760	45° WO	Pedaliera	IP 30	Black anodised
DAD-33-200-2-3000K-__BK	8,4 W	800	45° WO	Pedaliera	IP 30	Black anodised

CODICE D'ORDINE / ORDER CODE

DAD-33-200-1-2700K-__BK

45° WO apertura fascio / beam

ESEMPIO / EXAMPLE

DAD-33-200-1-2700K-WO-BK

MOTORE accessorio

ITEM	RECHARGEABLE BATTERY	PROTECTION LEVEL	FINISH
MOT-12-33-DC	33 Wh Rechargeable accumulator and charge dispenser. Powered by included charger. Stainless steel casing.	IP 20	steel



© design and engineering by ailis