


LINEA 14

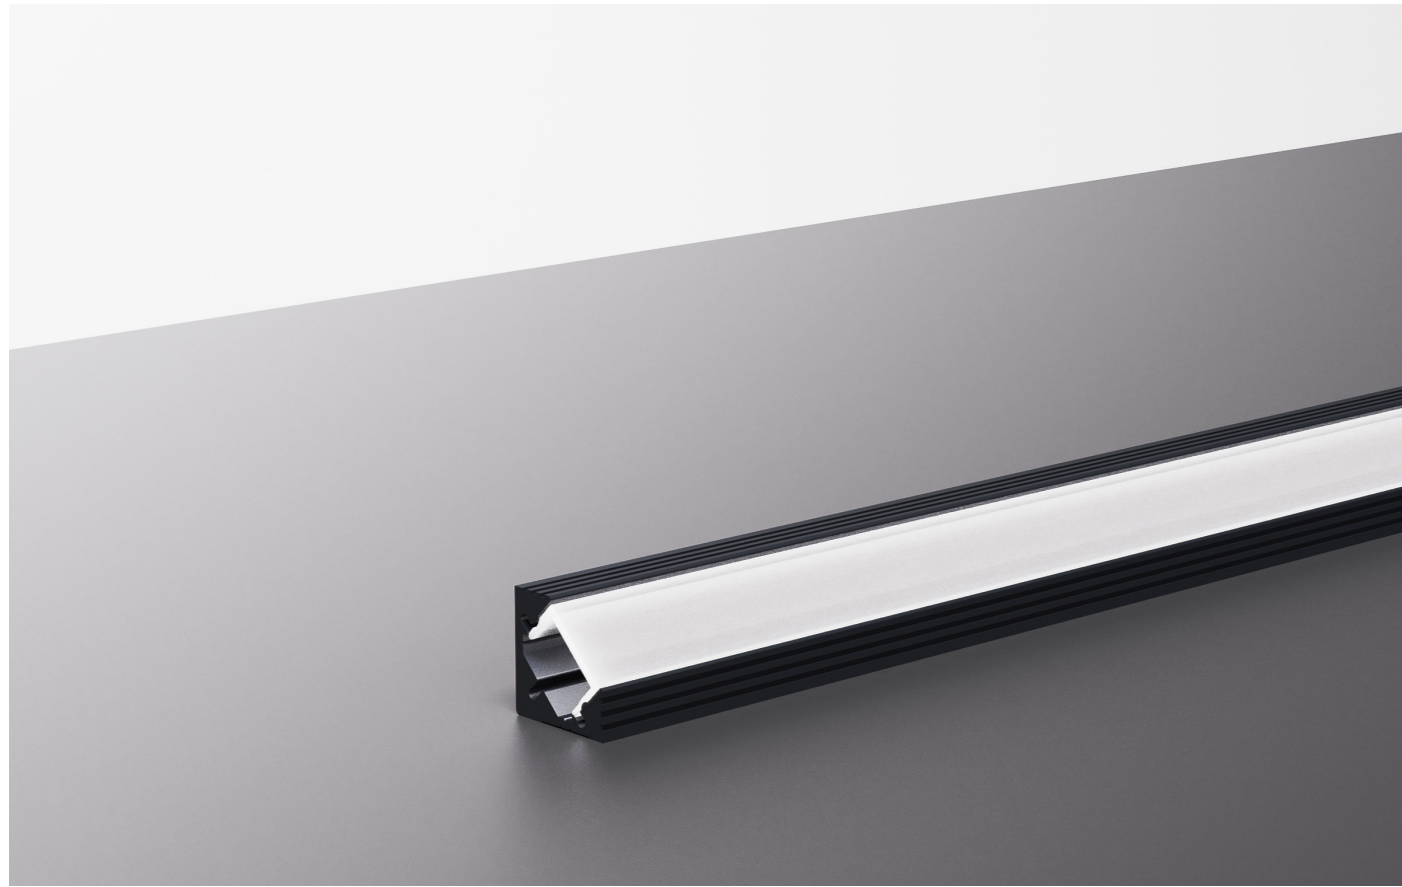

LINEA 14

Linea led luminosa per applicazioni interne. Corpo in alluminio nelle finiture anodizzato naturale, verniciato bianco e nero. Diffusori in policarbonato opalino, trasparente, prismaticizzato trasparente a basso UGR e in PMMA nero fumé. Completa di terminali di chiusura in plastica, di accessori di fissaggio e 2 metri di cavo di alimentazione. Personalizzabile con taglio su misura fino a 6 metri. Misura sezione 19,5 x 19,5 mm. Garanzia di 5 anni.


installazione	plafone / parete
utilizzo	interno
alimentazione	24V DC (*)
potenza per metro	6W/m 12W/m 18W/m 24W/m RGB
sorgente luminosa	led
temperatura colore	2700K 3000K 4000K
indice di resa cromatica	CRI > 90
diffusore standard	opalino diffondente beam 120°
dimmerazione	On/Off, dimmerabile
classe di isolamento	III

(*) Alimentatore remoto non incluso
(*) Remote Driver not included

120°




IT 04/2024 ailis srl Contenuti tecnici aggiornati.
Con riserva di modifiche.






Installazione a superficie
Surface installation



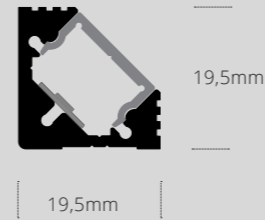

SEZIONE / SECTION



FINITURA / FINISH

-  **WT Bianco**
White
-  **BK Nero**
Black
-  **AL Anodizzato naturale**
Natural anodized

DIFFUSORI / DIFFUSERS

-  **DIFF-0100-OP**
Policarbonato opalino
-  **DIFF-0100-PR**
Prismaticizzato trasparente
-  **DIFF-0100-BK**
PMMA nero fumé
-  **DIFF-0100-TR**
Policarbonato trasparente

LINEA 14 cablata con certificazione CE

ITEM	WATT	LUMEN	BEAM ANGLE	DRIVER	PROTECTION LEVEL	FINISH
LIN-14-__IP30-6-2700K-__	6W/m	490	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-12-2700K-__	12W/m	1200	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-18-2700K-__	18W/m	1800	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-24-2700K-__	24W/m	2400	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-6-3000K-__	6W/m	500	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-12-3000K-__	12W/m	1200	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-18-3000K-__	18W/m	1800	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-24-3000K-__	24W/m	2400	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-6-4000K-__	6W/m	510	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-12-4000K-__	12W/m	1220	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-18-4000K-__	18W/m	1840	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-24-4000K-__	24W/m	2450	120°	Remote	IP 30	White, Black, Aluminium
LIN-14-__IP30-18-RGB-NQ-__	18W/m			Remote	IP 30	White, Black, Aluminium

CODICE D'ORDINE / ORDER CODE

LIN-14-__IP30-12-2700K-__

WT BK AL

ESEMPIO / EXAMPLE

LIN-14-WT-IP30-18-4000K-250

lunghezza in cm / length in centimeters