


LINEA 26 T

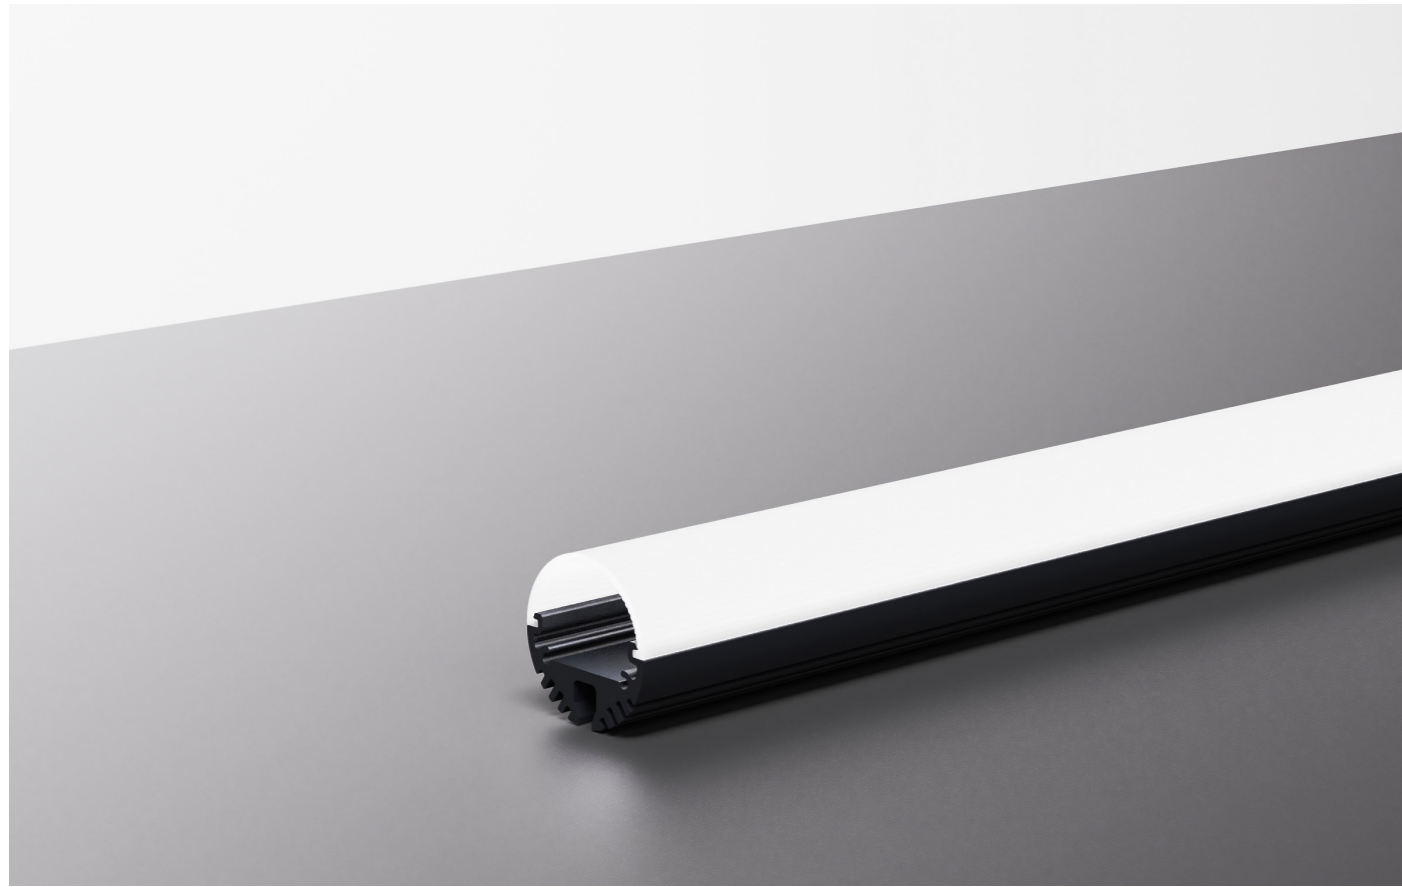


LINEA 26 T

Linea led luminosa per applicazioni interne. Corpo in alluminio nelle finiture anodizzato naturale, verniciato bianco e nero. Diffusori in policarbonato opalino. Completa di terminali di chiusura in plastica, di accessori di fissaggio e 2 metri di cavo di alimentazione. Personalizzabile con taglio su misura fino a 6 metri. Misura diametro 26 mm. Garanzia di 5 anni.


installazione	sospensione
utilizzo	interno
alimentazione	24V DC (*)
potenza per metro	12W/m 18W/m 24W/m
sorgente luminosa	led
temperatura colore	2700K 3000K 4000K
indice di resa cromatica	CRI > 90
diffusore standard	opalino diffondente beam 120°
dimmerazione	On/Off, dimmerabile
classe di isolamento	III

(*) Alimentatore remoto non incluso
(*) Remote Driver not included

120°



IT 04/2024 ailis srl Contenuti tecnici aggiornati.
Con riserva di modifiche.



Installazione a sospensione
Pending installation

SEZIONE / SECTION



26mm

FINITURA / FINISH

WT Bianco
White

BK Nero
Black

AL Anodizzato naturale
Natural anodized

DIFFUSORI / DIFFUSERS

DIFF-0100-OP
Policarbonato opalino

LINEA 26 T cablata con certificazione CE

ITEM	WATT	LUMEN	BEAM ANGLE	DRIVER	PROTECTION LEVEL	FINISH
LIN-26T-_-IP30-12-2700K-_-	12W/m	1200	120°	Remote	IP 30	White, Black, Aluminium
LIN-26T-_-IP30-18-2700K-_-	18W/m	1800	120°	Remote	IP 30	White, Black, Aluminium
LIN-26T-_-IP30-24-2700K-_-	24W/m	2400	120°	Remote	IP 30	White, Black, Aluminium
LIN-26T-_-IP30-12-3000K-_-	12W/m	1200	120°	Remote	IP 30	White, Black, Aluminium
LIN-26T-_-IP30-18-3000K-_-	18W/m	1800	120°	Remote	IP 30	White, Black, Aluminium
LIN-26T-_-IP30-24-3000K-_-	24W/m	2400	120°	Remote	IP 30	White, Black, Aluminium
LIN-26T-_-IP30-12-4000K-_-	12W/m	1220	120°	Remote	IP 30	White, Black, Aluminium
LIN-26T-_-IP30-18-4000K-_-	18W/m	1840	120°	Remote	IP 30	White, Black, Aluminium
LIN-26T-_-IP30-24-4000K-_-	24W/m	2450	120°	Remote	IP 30	White, Black, Aluminium

CODICE D'ORDINE / ORDER CODE

LIN-26-T-_-IP30-18-2700K-_-

WT BK AL

ESEMPIO / EXAMPLE

LIN-26-T-WT-IP30-18-4000K-250

lunghezza in cm / length in centimeters