


DADO E




DADO E

Lampada da esterni in acciaio inox o bronzo lavorato in pieno.
 Un design semplice e minimale che unisce materiali nobili e funzionalità per valorizzare gli spazi esterni.
 Dotato di stelo Ø8mm su picchetto di altezza standard L150cm, tagliabile a misura.
 Dimensioni testa lampada 33 x 33 x 33 mm.


installazione	terreno
utilizzo	esterno
alimentazione	12V DC
potenza	4,2W
sorgente luminosa	led
temperatura colore	2700K 3000K
flusso luminoso	350lm 370lm
indice di resa cromatica	CRI > 90
indice di abbagliamento	UGR<19
ottiche	45°, WIDE OPEN
classe di isolamento	III



UNI EN 12464-1-2
 CEI EN 60598-1
 CEI EN 62031
 CEI EN 62471
 CEI EN 55015
 CEI EN 61547
 CEI EN 61000-3-2
 CEI EN 61000-3-3
 CEI EN 50581-2012

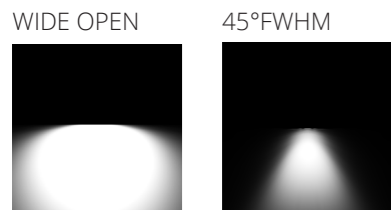

IT 02/2024 ailis srl Contenuti tecnici aggiornati.
 Con riserva di modifiche.

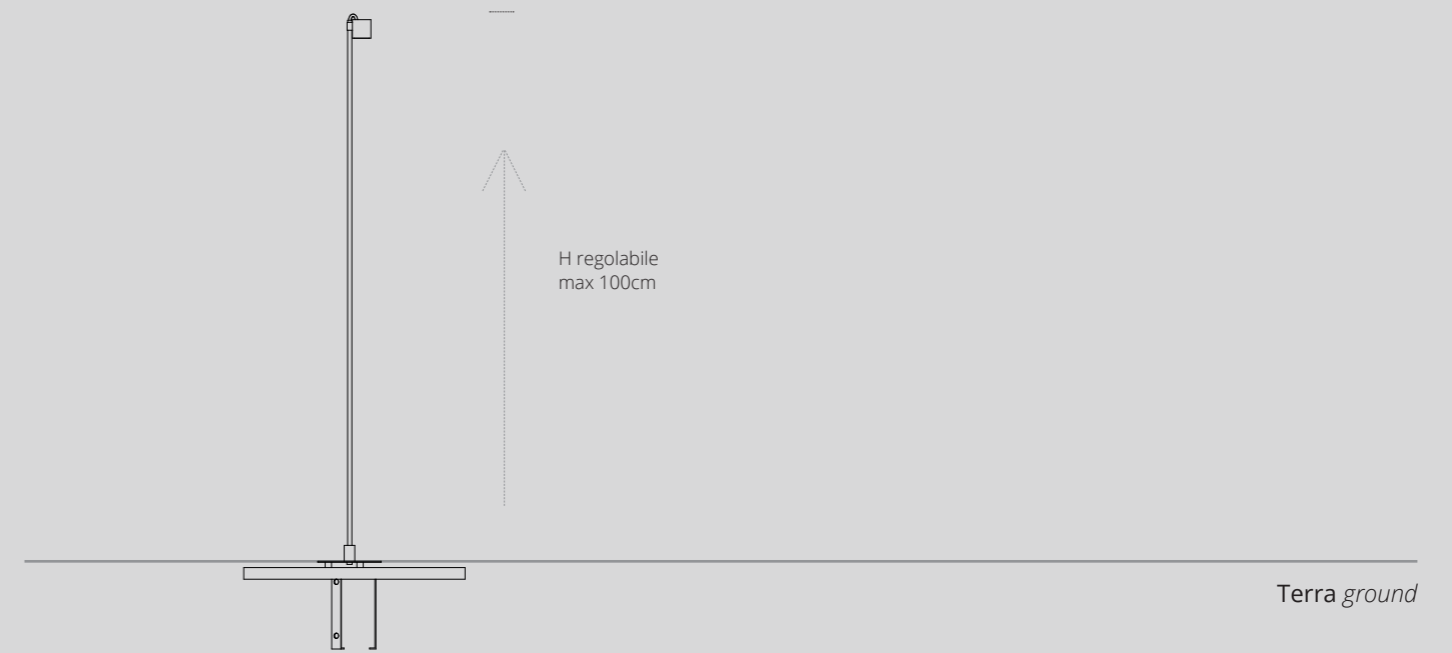

DADO E

ITEM	WATT	LUMEN	BEAM	DRIVER	PROTECTION LEVEL	FINISH
DAD-E-150-CV-2700K-_-BR	4,2 W	350	45° WIDE OPEN	Not included	IP 67	Bronze
DAD-E-150-CV-3000K-_-BR	4,2W	370	45° WIDE OPEN	Not included	IP 67	Bronze
DAD-E-150-CV-2700K-_-ST	4,2 W	350	45° WIDE OPEN	Not included	IP 67	Inox
DAD-E-150-CV-3000K-_-ST	4,2W	370	45° WIDE OPEN	Not included	IP 67	Inox

(*) Alimentatore non incluso
 (*) Driver not included

CODICE D'ORDINE / ORDER CODE

DAD-E-150-CV-2700K-_-BR

ESEMPIO / EXAMPLE

DAD-E-150-CV-2700K-**WO**-BR

45° WIDE OPEN apertura fascio / beam