


ZEN 1 mini



Soffitto Ceiling

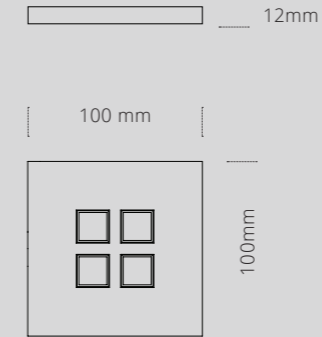

fissaggio magnetico ad accessori con inclusi


ZEN 1 mini

Lampada da interni per installazione a soffitto o a incasso con accessori predisposti.
 Installazione con fissaggio magnetico.
 Finiture bianco, nero, acciaio inox e ruggine.
 Ottiche di precisione.
 Misure 100 x 100 x 12 mm.


installazione	plafone
utilizzo	interno
alimentazione	SELV CC
potenza	9W
sorgente luminosa	led
temperatura colore	2700K 3000K 4000K
flusso luminoso	1080lm 1120lm 1170lm
indice di resa cromatica	CRI > 90
indice di abbagliamento	UGR < 19
driver	On/Off, DALI (*)
ottica standard	10° 25° 65° 100°
classe di isolamento	III



UNI EN 12464-1-2
 CEI EN 60598-1
 CEI EN 62031
 CEI EN 62471
 CEI EN 55015
 CEI EN 61547
 CEI EN 61000-3-2
 CEI EN 61000-3-3
 CEI EN 50581-2012

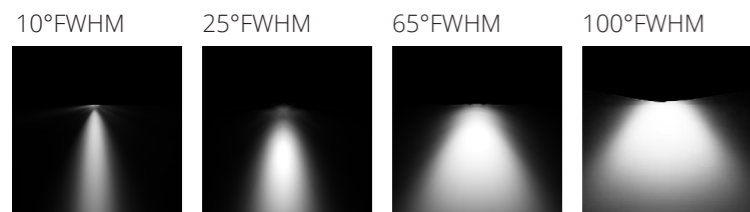

IT 02/2024 ailis srl Contenuti tecnici aggiornati.
 Con riserva di modifiche.



ZEN 1 mini

ITEM	WATT	LUMEN	BEAM	DRIVER	PROTECTION LEVEL	FINISH
ZEN1m - CC - 2700K - _ _ _ _	9 W	1080	10° 25° 65° 100°	Not included	IP 40	White, Black, Steel, Rust
ZEN1m - CC - 3000K - _ _ _ _	9 W	1120	10° 25° 65° 100°	Not included	IP 40	White, Black, Steel, Rust
ZEN1m - CC - 4000K - _ _ _ _	9 W	1170	10° 25° 65° 100°	Not included	IP 40	White, Black, Steel, Rust

(*) Alimentatore remoto non incluso
 (*) Remote driver not included

CODICE D'ORDINE / ORDER CODE

ESEMPIO / EXAMPLE

ZEN1m - CC - 3000K - _ _ _ _

ZEN1m - CC - 3000K - 25° - RU

WT White, BK Black, ST Steel finitura / finish

10° 25° 65° 100° apertura fascio / beam