

ZEN 1 MINI

ailis




ZEN 1 MINI

Lampada da interni per installazione a soffitto o a incasso con accessori predisposti.
Installazione con fissaggio magnetico.
Finiture bianco o nero.
Ottiche di precisione.
Misure 100 x 100 x 12 mm.

installazione	plafone
utilizzo	interno
alimentazione	SELV CC
potenza	9W
sorgente luminosa	led
temperatura colore	2700K 3000K 4000K
flusso luminoso	1080lm 1120lm 1170lm
indice di resa cromatica	CRI > 90
indice di abbagliamento	UGR < 19
driver	On/Off, DALI (*)
ottica standard	10° 25° 65° 100°
classe di isolamento	III



UNI EN 12464-1-2
CEI EN 60598-1
CEI EN 62031
CEI EN 62471
CEI EN 55015
CEI EN 61547
CEI EN 61000-3-2
CEI EN 61000-3-3
CEI EN 50581-2012

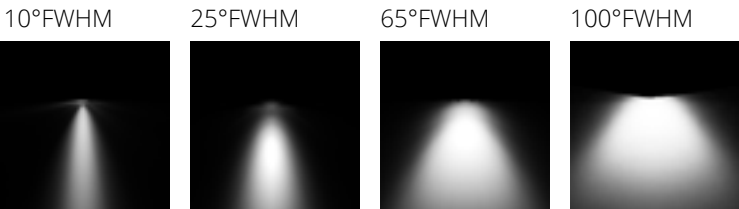

IT 07/2026 ailis srl Contenuti tecnici aggiornati.
Con riserva di modifiche.





fissaggio magnetico con staffa di ancoraggio inclusa

ZEN 1 MINI

ITEM	WATT	LUMEN	BEAM	DRIVER	PROTECTION LEVEL	FINISH
ZEN1m - CC - 2700K - _ _ - _ _	9 W	1080	10° 25° 65° 100°	Not included	IP 40	White, Black
ZEN1m - CC - 3000K - _ _ - _ _	9 W	1120	10° 25° 65° 100°	Not included	IP 40	White, Black
ZEN1m - CC - 4000K - _ _ - _ _	9 W	1170	10° 25° 65° 100°	Not included	IP 40	White, Black

(*) Alimentatore remoto non incluso
(*) Remote driver not included

CODICE D'ORDINE / ORDER CODE

ZEN1m - CC - 3000K - _ _ - _ _	WT White, BK Black	finitura / finish
	10° 25° 65° 100°	apertura fascio / beam

ESEMPIO / EXAMPLE

ZEN1m - CC - 3000K - 25°- BK